

# SD-40

## DRIVER UNIT



UDE's experience in the design of horn speakers has made it possible to make the **SD-40** Driver, which is based on three pivotal characteristics: High Performance, Voice Intelligibility and Reliability. It also provides good music playback.

The **SD-40** driver is coupled to the BP-30 and BG-50 exponential horns depending on the application.


### FEATURES

- ✓ High performance
- ✓ Maximum mechanical and electrical resistance
- ✓ Penetrating sound that enhances voice
- ✓ Indoor and outdoor applications
- ✓ Long service life
- ✓ Reinforced phenolic resin moulded membrane
- ✓ Membrane auto-alignment device


### SPECIFICATIONS

- Rated power:	40 W. RMS.
- Impedance:	16 ohms.
- Frequency response:	125 at 7500 Hz.
- Sensitivity (*):	110 dB 1 W./1 m./1,5 KHz.
- Driver Horn coupling:	RW 1 3/8" (18 wires").
- Colour:	Anthracite grey.
- Membrane:	MS-40.
- Wiring:	Snap-on terminals.
- Dimensions:	∅110 x 105 mm.
- Weight:	1,6 Kg.

(\*): Coupled to the BG-50 horn

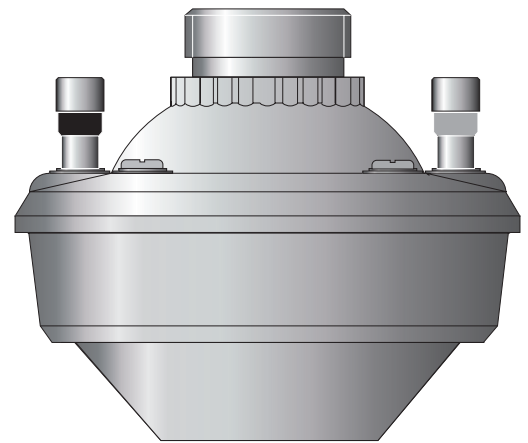

### FREQUENCY RESPONSE

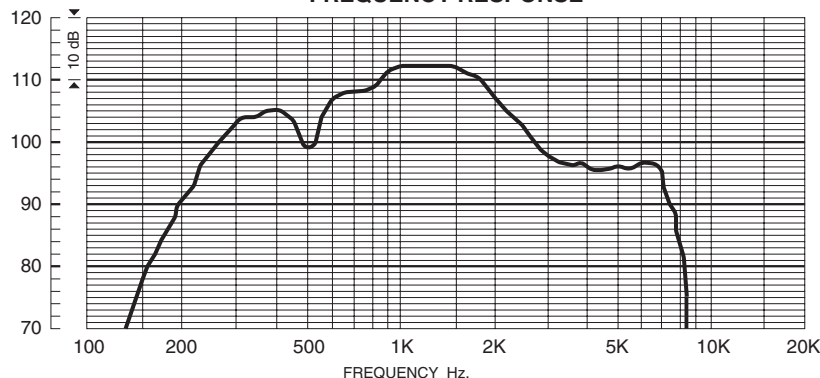

Electroacústica



[www.udeaudio.com](http://www.udeaudio.com)

Main Office Avda. BARCELONA, 24  
08970 - SANT JOAN DESPÍ  
BARCELONA - ESPAÑA  
Tel: 34-93 477 28 54  
Fax: 34-93 261 17 52  
[ude@udeaudio.com](mailto:ude@udeaudio.com)

Madrid Delegation C/ LUIS I, 88, 3ª planta  
28031 - MADRID  
ESPAÑA  
Tel: 34-91 311 60 76  
Fax: 34-91 450 19 97  
[centro@udeaudio.com](mailto:centro@udeaudio.com)

ISO 9001  
BUREAU VERITAS  
Certification



UDE reserves the right to modify the technical characteristics of its products without previous notice

610.207A | 1 / 1