


# BP-20/10TM



## BOCINAS EXPONENCIALES HAUT-PARLEUR A CHAMBRE DE COMPRESSION EXPONENTIAL HORNS

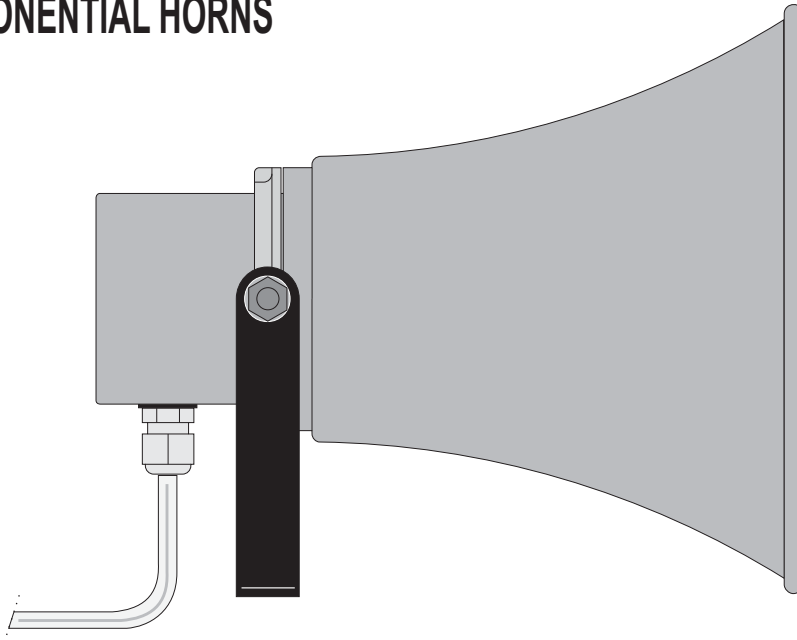


GRADO DE PROTECCIÓN ENVOLVENTE DEGRÉ DE PROTECTION REVÊTEMENT DEGRE OF CASING PROTECTION		
NORMAS / NORMES / STANDARDS	EN 60529	UNE 20-324
CÓDIGO / CODE IP	<b>IP-66</b>	
CERTIFICADO / CERTIFICAT / CERTIFICATE L.G.A.I. n° 98013523		

+			-
L. 100V			Común Commun Common
<b>10 W</b>	<b>5 W</b>	<b>2.5 W</b>	
1 K $\Omega$	2 K $\Omega$	4 K $\Omega$	
Azul Bleu Blue	Amarillo Jaune Yellow	Blanco Blanc White	
			Rojo Rouge Red

CARACTERISTICAS TECNICAS	
- Potencia nominal:	10 W.
- Sensibilidad:	104/114 dB SPL 1 W/10 W.
- Banda pasante:	350 a 11000 Hz.
- Impedancia:	Transformador línea 100 V.
- Angulo apertura:	90°.
- Peso:	1.1 Kg.
- Color:	Gris.
- Selección de potencia (línea 100 V.):	10 / 5 / 2.5 W.

CARACTERISTIQUES TECHNIQUES	
- Puissance nominale:	10 W.
- Pression acoustique:	104/114 dB SPL 1 W/10 W.
- Bande passante:	350 à 11000 Hz.
- Impédance:	Transformateur ligne 100 V.
- Angle de dispersion:	90°.
- Poids:	1.1 Kg.
- Couleur:	Gris.
- Sélection de puissance (ligne 100 V.):	10 / 5 / 2.5 W.

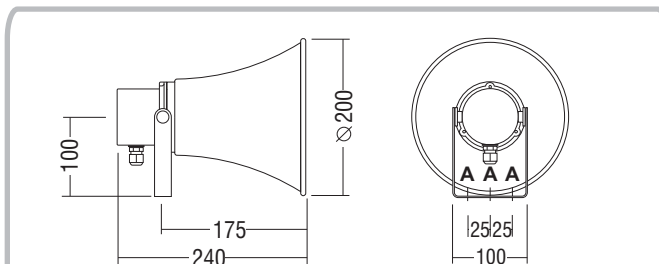

### BP-20/10TM

MATERIAL: ALUMINIO. TORNILLERIA: ACERO INOX. BRIDA DE SUJECCION: ACERO INOX.  
MATERIAU: ALUMINIUM. VISSERIE: ACIER INOX. BRIDE DE FIXATION: ACIER INOX.  
MATERIAL: ALUMINIUM. SCREWS: STAINLESS STEEL. BRACKET: STAINLESS STEL.

- A = 3 TALADROS ANCLAJE (∅ 10 mm.)
- A = 3 TROUS ANCRAGE (∅ 10 mm.)
- A = 3 DRILL HOLES FOR FIXING (∅ 10 mm.)

MEDIDAS EN MILIMETROS  
MESURES EN MILLIMETRES  
MEASUREMENTS IN MILLIMETRES

TECHNICAL CHARACTERISTICS	
- Rated power:	10 W.
- Acoustic pressure:	104/114 dB SPL 1 W/10 W.
- Bandwidht:	350 to 11000 Hz.
- Impedance:	100 V. line transformer.
- Dispersion angle:	90°.
- Weight:	1.1 Kg.
- Colour:	Grey.
- Power selection (100 V. line.):	10 / 5 / 2.5 W.

Electroacústica



www.udeaudio.com

Central Avda. BARCELONA, 24  
08970 - SANT JOAN DESPÍ  
BARCELONA - ESPAÑA  
Tel: 34-93 477 28 54  
Fax: 34-93 261 17 52  
ude@udeaudio.com

Delegación C/ LUIS I, 88, 3ª planta  
Madrid 28031 - MADRID  
ESPAÑA  
Tel: 34-91 311 60 76  
Fax: 34-91 450 19 97  
centro@udeaudio.com

ISO 9001  
BUREAU VERITAS  
Certification



Se reserva el derecho de variar las características técnicas de sus productos sin previo aviso

610.092CFA | 1 / 1